

10059661 1062402
JG19 Rec'd PCT/PTO 25 FEB 2002

FORM PTO-1390 (REV. 5-93)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE	
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371		ATTORNEY'S DOCKET NUMBER 10537/199	
		U.S. APPLICATION NO. (If known, see 37 CFR 1.5) To Be Assigned 10/069661	
INTERNATIONAL APPLICATION NO. PCT/EP00/08233	INTERNATIONAL FILING DATE 23 August 2000 (23.08.00)	PRIORITY DATE CLAIMED 24 August 1999 (24.08.99) 19 May 2000 (19.05.00)	
TITLE OF INVENTION SPRING-AND-SHOCK-ABSORBER SYSTEM HAVING DIFFERENTIAL ROLL BELLOWS			
APPLICANT(S) FOR DO/EO/US ACKER, Bernd; BANK, Christoph; CERNY, Paul; GÖNNHEIMER, Peter; KLANDER, Hans-Peter; MELJNIKOV, Darko; RÖMER, Matthias; RÖß, Karl-Heinz; RUTZ, Rüdiger; THUROW, Gehard; and WINKLER, Martin			
Applicants herewith submit to the United States Designated/Elected Office (DO/EO/US) the following items and other information.			
1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.			
2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.			
3. <input checked="" type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)) immediately rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).			
4. <input checked="" type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.			
5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2))			
a. <input type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau).			
b. <input checked="" type="checkbox"/> has been transmitted by the International Bureau.			
c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US)			
6. <input checked="" type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371(c)(2))			
7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))			
a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau)			
b. <input type="checkbox"/> have been transmitted by the International Bureau.			
c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.			
d. <input checked="" type="checkbox"/> have not been made and will not be made.			
8. <input type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3))			
9. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)) (unsigned).			
10. <input checked="" type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).			
Items 11. to 16. below concern other document(s) or information included:			
11. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98			
12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.			
13. <input checked="" type="checkbox"/> A FIRST preliminary amendment.			
14. <input checked="" type="checkbox"/> A substitute specification			
15. <input type="checkbox"/> A change of power of attorney and/or address letter			
16. <input checked="" type="checkbox"/> Other items or information: International Search Report (translated), International Preliminary Examination Report (translated); Marked-up Version of the Substitute Specification; three (3) sheets of formal drawings, and first page of the published International Application WO 01/14765.			

EXPRESS MAIL NO.: EL327553638US

U.S. APPLICATION NO. if known, see 37 C.F.A.1.5

10/069661

INTERNATIONAL APPLICATION NO* PCT/EP00/08233

ATTORNEY'S DOCKET NUMBER 10537/199

17. ☐ The following fees are submitted

Basic National Fee (37 CFR 1.492(a)(1)-(5)):

Search Report has been prepared by the EUROPEAN PATENT OFFICE or JPO

\$890 00

International preliminary examination fee paid to USPTO (37 CFR 1 482) \$710 00

No international preliminary examination fee paid to USPTO (37 CFR 1 482) but international search fee paid to USPTO (37 CFR 1 445(a)(2)) \$740 00

Neither international preliminary examination fee (37 CFR 1 482) nor international search fee (37 CFR 1 445(a)(2)) paid to USPTO \$1,040 00

International preliminary examination fee paid to USPTO (37 CFR 1 482) and all claims satisfied provisions of PCT Article 33(2)-(4) \$100 00

CALCULATIONS | PTO USE ONLY

ENTER APPROPRIATE BASIC FEE AMOUNT = \$ 890

Surcharge of \$130 00 for furnishing the oath or declaration later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1 492(e))

\$

Claims	Number Filed	Number Extra	Rate		
Total Claims	15 - 20 =	0	X \$18.00	\$ 0	
Independent Claims	2 - 3 =	0	X \$84 00	\$ 0	
Multiple dependent claim(s) (if applicable)			+ \$280 00	\$	

TOTAL OF ABOVE CALCULATIONS = \$ 890

Reduction by 1/2 for filing by small entity, if applicable Verified Small Entity statement must also be filed. (Note 37 CFR 1 9, 1 27, 1.28)

\$

SUBTOTAL = \$ 890

Processing fee of \$130 00 for furnishing the English translation later the ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1 492(f)).

\$

TOTAL NATIONAL FEE = \$ 890

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3 31). \$40.00 per property

\$

TOTAL FEES ENCLOSED = \$ 890

Amount to be:
refunded \$
charged \$

- a. ☐ A check in the amount of \$ _____ to cover the above fees is enclosed.
- b. ☐ Please charge my Deposit Account No. 11-0600 in the amount of **\$890.00** to cover the above fees. A duplicate copy of this sheet is enclosed.
- c. ☐ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 11-0600. A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1 495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:
Kenyon & Kenyon
One Broadway
New York, New York 10004

1-212-425-7200

CUSTOMER NO. 26646

for Richard L. Mayer
SIGNATURE

Richard L. Mayer, Reg. No. 22,490
NAME

DATE 2/25/02

[10537/199]

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Inventors : ACKER et al.
Serial No. : To Be Assigned
Filed : Herewith
For : SPRING-AND-SHOCK ABSORBER SYSTEM HAVING
DIFFERENTIAL ROLL BELLOWS
Examiner : To Be Assigned
Art Unit : To Be Assigned

Assistant Commissioner
for Patents
Washington, D.C. 20231

**PRELIMINARY AMENDMENT AND
37 C.F.R. § 1.125 SUBSTITUTE SPECIFICATION STATEMENT**

SIR:

Please amend the above-identified application before examination, as set forth below.

IN THE SPECIFICATION AND ABSTRACT:

In accordance with 37 C.F.R. § 1.121(b)(3), a Substitute Specification (including the Abstract, but without claims) accompanies this response. It is respectfully requested that the Substitute Specification (including Abstract) be entered to replace the Specification of record.

IN THE CLAIMS:

On the first page of the claims, first line, change "What is claimed is:" to:
--What Is Claimed Is--.

Please cancel original claims 1 to 16, without prejudice, in the underlying PCT Application No. PCT/EP00/08233. Please also cancel, without prejudice, substitute claims 3-9 and 14-15 in the annex to the International Preliminary Examination Report.

Please add the following new claims:

17. (New) A combined spring-and-shock-absorber system for supporting at least one of wheel suspensions and axles on a vehicle body, comprising:

an outer bell;

a rolling piston;

a hydraulic accumulator that is supported on at least one of a chassis side and a vehicle body side; and

a tubular roll bellows positioned between one of a wheel-bearing and wheel-controlling connection and a connection on a vehicle body side, the bellows being arranged between the outer bell and the rolling piston, the outer bell and the rolling piston each having at least partially varying diameters over a height of the respective component, the outer bell and the rolling piston each having walls that contact the bellows, ends of the tubular roll bellows being sealingly secured to the rolling piston at segments having different diameters, a lower mounting section of the bellows having a larger diameter than an upper mounting section of the bellows, the bellows having a bellows interior filled with a fluid and configured to communicate with the hydraulic accumulator.

18. (New) The combined spring-and-shock-absorber system of claim 17, wherein the tubular roll bellows is a differential roll bellows having at least two parts.

19. (New) The combined spring-and-shock-absorber system of claim 18, wherein ends of the at least two parts of the differential roll bellows face and connect to each other by a connecting sleeve.

20. (New) The combined spring-and-shock-absorber system of claim 19, wherein the connecting sleeve has a working line that passes through the outer bell.

21. (New) The combined spring-and-shock-absorber system of claim 17, wherein one of at least one restrictor and at least two throttle return valves is arranged in a fluid flow between the bellows interior and the hydraulic accumulator.

22. (New) The combined spring-and-shock-absorber system of claim 17, wherein the fluid is a water-alcohol solution.

23. (New) The combined spring-and-shock-absorber system of claim 17, wherein during travel operation of a vehicle, the bellows interior is connected to an external fluid supply via a supply line.

24. (New) A combined spring-and-shock-absorber system for supporting one of wheel suspensions and axles on a vehicle body, comprising:

- an outer bell;
- a rolling piston;
- an accumulator having a volume; and

a tubular roll bellows positioned between one of a wheel-bearing and wheel-controlling connection and a connection on the vehicle body side, the bellows being arranged between the outer bell and the rolling piston, the outer bell and the rolling piston each having at least partially varying diameters over a height of the respective component, the outer bell and the rolling piston each having walls that contact the bellows, ends of the bellows being sealingly secured on the rolling piston at segments having different diameters, a lower mounting section of the bellows having a larger diameter than an upper mounting section of the bellows, the bellows enclosing a bellows interior filled with a volume of gas, the bellows interior being controllably connected to the accumulator volume and to a pressure pump via tubular connectors located in the wall of the outer bell.

25. (New) The combined spring-and-shock-absorber system of claim 24, wherein:

the tubular roll bellows includes two roll-bellows halves constituting a differential roll bellows;

the rolling piston includes an upper segment and a lower segment constituting a differential rolling piston; and

the roll-bellows halves of the differential roll bellows and the upper and lower segments of the differential rolling piston are arranged so as to be opposite each other.

26. (New) The combined spring-and-shock-absorber system of claim 25, wherein the roll-bellows halves are configured to roll on interior surfaces of an upper and a lower segment of the outer bell and on exterior walls of the upper and lower segments of the rolling piston.

27. (New) The combined spring-and-shock-absorber system of claim 26, wherein the exterior walls of the rolling piston and the interior surfaces of the outer bell are arranged such that the two roll-bellows halves, configured to roll between the rolling piston and the outer bell, have effective radii that are different from each other.

28. (New) The combined spring-and-shock-absorber system of claim 24, wherein the upper segment of the rolling piston, assigned to a first roll-bellows half, has a different radius than the lower segment of the rolling piston, assigned to a second roll-bellows half.

29. (New) The combined spring-and-shock-absorber system of claim 24, wherein the two roll-bellows halves are secured to the rolling piston and the outer bell in a pressure-tight manner using at least one of clamping rings and a connecting sleeve.

30. (New) The combined spring-and-shock-absorber system of claim 24, wherein the rolling piston is configured in a hollow cylindrical fashion to receive a shock absorber, a first end of the shock absorber being mounted fixedly on a lower end of the rolling piston, and a second end of the shock absorber being secured fixedly on a covering plate located on the outer bell.

31. (New) The combined spring-and-shock-absorber system of claim 24, wherein the rolling piston is configured in a hollow cylindrical fashion and is part of an enclosed shock absorber as a shock-absorber tube.

Remarks

This Preliminary Amendment cancels, without prejudice, original claims 1-16 in the underlying PCT Application No. PCT/EP00/08233, and also cancels, without prejudice, substitute claims 3-9 and 14 - 15 in the annex to the International Preliminary Examination Report. The Preliminary Amendment also adds new claims 17-31. The new claims conform the claims to U.S. Patent and Trademark Office rules and do not add new matter to the application.

In accordance with 37 C.F.R. § 1.121(b)(3), the Substitute Specification (including the Abstract, but without the claims) contains no new matter. The amendments reflected in the Substitute Specification (including Abstract) are to conform the Specification and Abstract to U.S. Patent and Trademark Office rules or to correct

[Faint, illegible handwritten notes]

KENYON & KENYON

2/25/02

By Richard L. Mayer
Richard L. Mayer
(B. N. 22, 128)

(62) *Sh*
Ry. No.
36, 197)

One Broadway
New York, NY 10004
(212) 425-7200

SPRING-AND-SHOCK-ABSORBER SYSTEM HAVING DIFFERENTIAL ROLL
BELLOWS

5 FIELD OF THE INVENTION

The present invention relates to a combined spring-and-shock-
absorber system for supporting wheel suspensions or axles on a
vehicle body using a tubular roll bellows (U-bellows) arranged
between a wheel-bearing or wheel-controlling connection and a
10 connection on the vehicle body side, the bellows being
arranged between an outer bell and a rolling piston, the outer
bell and the rolling piston, in each case, having at least
partially varying diameters over the height of the
corresponding component, and having walls that contact the
15 tubular roll bellows. Both ends of the tubular roll bellows
are sealingly secured on the rolling piston at segments having
different diameters, the lower mounting section having a
larger diameter than the upper mounting section.

20 BACKGROUND INFORMATION

United States Published Patent No. 4,518,154, describes a
conventional pneumatic suspension system for vehicles. The
outer bell and the multi-part rolling piston enclose a unitary
differential roll bellows. Due to the low gas pressure and the
25 use of a differential roll bellows, this design may require an
installation space of an excessively large volume.

In addition, German Published Patent No. 297 02 927 describes
a conventional spring-and-shock-absorber system, which is
30 composed of a displacement device without a bellows, a
hydraulic accumulator, and a hydraulic line connecting these
parts. In the hydraulic line, a mechanical choker valve is
arranged. The displacement device, as is conventional in a
hydropneumatic suspension system, connects the vehicle wheel
35 suspension to the vehicle body. The system is filled with a
hydraulic fluid. The latter, when a vehicle wheel is spring

deflected, is forced through the choker valve into a hydraulic accumulator. The flow resistance of the choker valve generates a damping force, whereas the compression of the gas volume in the hydraulic accumulator creates a spring force. In accordance with the principle of displacement presented here, a displacement piston plunges into a displacement cylinder. Both parts move in a guiding and sealing interaction, generating friction against each other. The friction impairs the response time of the spring-and-shock-absorber system, so that when it is used in a vehicle, the driving comfort of wheels supported by this system may not be optimal.

United States Published Patent No. 4,493,481 depicts a pneumatic spring for motor vehicles having a closed spring volume and two effective, changeable spring surfaces, whose sizes are a function of the spring elongation, and which are supported in a coaxial manner against each other, the spring surfaces being of different sizes, mutually acted upon by pressure, and facing away from each other. The tubular roll bellows is secured on both ends, having the same diameters, on the rolling piston and is configured as a one-piece tubular roll bellows.

In British Published Patent No. 2,318,851, a multi-bellows spring system having hydraulic accumulators connected by lines is described. Two separate, enclosed bellows, that are different in size, have each available to it its own hydraulic accumulator. These are two systems that are separated from each other hydraulically, each bellows, viewed in the spring direction, on the chassis side and on the wheel-controlling side, having the same piston surfaces. The bellows are essentially freestanding bellows, whereas in the exemplary embodiments according to the invention, the bellows are supported over virtually the entire area between an outer bell and a rolling piston. Between the bellows, there is a mechanical transmission element that is independent of the bellows.

In response to a pressurizing or depressurizing of the displacement device, a hydraulic fluid flows back and forth between the displacement device and the hydraulic accumulator via a narrowing of the cross-section in the form of a hydraulic line or an opening. The configuration of the line, or the opening, and the characteristics of the restrictors arranged there influence the system dampening in accordance with the size and shape of the opening cross-section. In this context, the individual restrictor may be configured either as a nozzle or an aperture, or at least as a one-way restrictor. When one-way restrictors are used, at least one valve for each flow direction may be arranged in the cross-section of the line, or the opening.

The gas cushion of the hydraulic accumulator normally constitutes the suspension system.

As a result of using a tubular roll bellows in the form of a differential roll bellows, the mechanical friction of the entire system may be essentially reduced to the interior friction of the bellows or membrane material. As a result, the spring-and-shock-absorber system may demonstrate virtually ideal responsiveness over the entire range of damping rates.

The outer bell and/or the rolling piston may each be directly secured--even without the interposition of rubber-elastic elements--on the vehicle body, or on the chassis, via flexible couplings. This may reduce, inter alia, the component weight, the manufacturing costs, the difficulty of assembly, and maintenance costs.

Both rolling piston halves, in addition to the two

corresponding halves of the differential roll bellows in the suspension device according to the present invention, provide a self-centering guide function between the double rolling piston and the outer bell. On account of the relatively high operating pressure -- in comparison to conventional air suspension systems -- this radial guidance may be especially stable.

On the other hand, due to the rubber-elastic decoupling of piston and outer bell, the excitation of higher-frequency vibrations may be filtered out. The shape of the suspension device as a differential roll bellows may be oblong, which, in addition to the very good radial (lateral) guidance, also provides very good longitudinal guidance. For this reason, it is possible, substantially or even entirely, to dispense with a separate longitudinal and transverse control arm.

The spring force is determined by the difference in the effective radii of curvature of the two roll bellows halves (differential roll bellows halves). The radii of curvature of the roll bellows halves are produced by the differences in the radii (or diameters) of the outer bell and the two piston (halves). If the difference between the individual piston radii is slight, then the difference in the radii of curvature of the roll bellows halves may also be slight. This has the consequence that it is possible to operate at a high operating pressure, as may be required in active chassis control systems.

The difference in the effective roll-bellows radii of curvature, instead of using a difference in the piston radii, may be realized using a radius difference of the effective outer-bell segments.

The roll bellows halves, arranged so as to be opposite each other, are clamped, on one side, to the outer bell and, on the other side, to the piston using clamping rings so as to be

working line (76), arranged between the latter and having an integrated choker valve (77, 48, 64).

The displacement device (10) is composed, inter alia, of a multi-stage outer bell (30), an also multi-stage rolling piston (50), and a multi-part differential roll bellows (11), connecting both elements. In response to a spring deflection and rebound, rolling piston (50), secured, for example, on the chassis, moves up and down, centeringly guided by differential roll bellows (11). In this context, exterior wall (23, 24) of differential roll bellows (11) rolls on outer bell (30) and on rolling piston (50).

Outer bell (30) is a hollow body, which contains here two at least partially cylindrical segments (31, 33), which are connected to each other by a transition piece (32) in the shape of a truncated-cone sleeve. In Figure 1, segments (31, 32) and transition piece (33) are made of one part. Upper segment (31) is closed at its upper end by a plate (34). On plate (34), an adapter (35) is formed for the articulated connection to the vehicle body. The interior diameter of the upper, cylindrical segment (31) is, for example, one third smaller than the interior diameter of lower, cylindrical segment (33).

Segments (31) and (33) may also have an interior contour in the shape of a truncated cone. In a case of this type, upper segment (31) would taper towards the top and lower segment (33) would taper towards the bottom.

Rolling piston (50) also has an upper (51) and a lower segment (55), both segments (51, 55) having, for example, a cylindrical outer shape (56, 57). The exterior diameter of upper segment (51) is smaller than the exterior diameter of segment (55). The exterior diameter of segment (51) is, for example, roughly 60% of the interior diameter of outer-bell segment (31). The diameter differential in the exemplary

In a second step, rolling piston (50) is inserted into differential roll bellows (11), until the upper roll-bellows end reaches the middle of upper segment (51). During the insertion, the lower area of roll bellows (11) is turned back over clamping ring (59), so that exterior wall (24) of bellows (11) contacts rolling-piston segment (55).

In the center of upper segment (51) is located a recess (53), in which interior wall (25) of the upper end of bellows (11) is fixed using a clamping ring (58). The depth of recess (53) is chosen so that the exterior contour of mounted clamping ring (58) has approximately the same diameter as segment (51) in the zone, which, in the assembled state, exterior wall (24) of bellows (11) contacts. Beneath recess (53), in the exemplary embodiments, segment (51) has a diameter which is greater by roughly double the bellows wall thickness in comparison with the diameter of segment (51) above recess (53).

After the mounting of differential roll bellows (11) on rolling piston (50), both parts are inserted into outer bell (30), until connecting sleeve (14), having roll bellows half (12), contacts transition piece (32). For the final positioning of differential roll bellows (11), rolling piston (50) is pulled back into a central position within outer bell (30). In this context, as a meniscus (21) is formed having an upwards orientation, exterior wall (23) of roll bellows half (12) is turned back over clamping ring (58) and outer wall (56) of segment (51).

Consequently, in response to every operationally-caused relative motion between parts (30) and (50), exterior walls (23, 24) of differential roll bellows (11) roll on outer walls (56, 57) and inner walls (36, 37). Because in the exemplary embodiments, menisci (21, 22) of differential roll bellows (11) move in narrow annular spaces having cylindrical walls, the centering forces and the transverse rigidity are virtually

constant over the entire stroke of the spring-and-shock-absorber leg.

Therefore, meniscuses (21, 22) in the entire stroke range move between rolling piston (50) and outer bell (30) in, for example, cylindrical zones. In this context, meniscus (21) realizes a piston surface, which is, for example, two-thirds smaller than the active piston surface on segment (55).

According to Figure 1, the usable overall stroke of the shock absorber leg corresponds to roughly the interior diameter of outer bell (30) in the area of segment (33).

The lengths of individual roll-bellows halves (12) and (13) correspond, for example, to one-and-a-half to double the bellows diameter in the area of the segment (33).

Interior (5), enclosed by differential roll bellows (11), is filled with an incompressible fluid (1), which, according to Figure 1, is under pressure by a gas cushion enclosed in a hydraulic accumulator (70). Hydraulic accumulator (70) is configured, for example, as a bubble or membrane accumulator. Gas cushion (72), divided by the bladder or membrane, constitutes the suspension unit of the spring-and-shock-absorber system.

Hydraulic accumulator (70), which is depicted in an arrangement next to outer bell (30) only by way of example, is connected to bellows interior (5) via a working line (76). For this purpose, working line (76) runs through outer-bell segment (33) and connects to connecting sleeve (14). In this way, working line (76) itself positions connecting sleeve (14) in outer-bell segment (33) in a form-locking manner.

In housing (74) of hydraulic accumulator (70), on the transition to working line (76), are located two operating pressure-stage valves, opposite each other, in the form of

5

10

15

20

35

5 Exterior hollow space (65) is an annular space, which is formed by the interior wall of rolling piston (50) and a foliated tubular membrane (66). Tubular membrane (66), for this purpose, is fixed at the upper end by a ring adapter (67) in the area of the base of blind-hole bore (61) and at its
10 lower end by a comparable ring adapter (67) in a base plate screwed into rolling piston (50). Annular space (65) is filled with gas via a valve (68) that is situated in this base plate.

Central hollow space (62) is in a hydraulic connection to
15 bellows interior (5) via bore holes (63) and a double-acting
leaf valve (64).

The second hydraulic accumulator is arranged in the area of upper outer-bell segment (31). For this purpose, outer bell (30) is surrounded here by, for example, a tubular housing (41). Between this housing (41) and the exterior contour of outer bell (30) is situated a general annular space, which is divided by a tubular membrane (42) into an inner (43) and outer annular space (44). Inner annular space (43) is filled with gas, see valve (45), whereas exterior annular space (44), comparable to fluid space (75) in Figure 1, communicates with bellows interior (5) via at least one leaf valve (48). Leaf valve(s) (48) in the exemplary embodiments according to Figure 2 are situated in a detachable housing (46). Interior space (47) of housing (46) is connected to bellows interior (5) via working line (76).

If appropriate, spaces (44) and (62) may also be hydraulically connected to each other directly and only communicate with bellows interior (5) via a double-acting leaf valve.

In contrast to Figure 1, a rubber damping element (49), as an

elastic limit stop, is located in deaerated return space (7). In addition, upper segment (51) of rolling piston (50) is furnished with a closed bore hole (52) to reduce the unsuspended mass.

5

Between the chassis and the vehicle body, the spring leg may also be arranged so as to have an outer bell attached in an articulated manner to the chassis. For this purpose, at least the contours of the rolling piston and the outer bell may be required to be adjusted to the new orientation of the rebound spring direction.

As an alternative to the exemplary embodiments described above, a spring-and-shock-absorber system is conceivable in which fluid (1) used in the system is a magneto-rheological fluid. If on hydraulic working line (76), for example, a short annular segment is surrounded by a current-excited solenoid coil, then the excited solenoid coil in combination with fluid (1) represents a variable restrictor. As the current supplied to the coil increases, the flow velocity decreases as a result of an increase in the apparent or dynamic viscosity in working line (76), as a result of which, inter alia, the damping performance of the entire system may be changed in a controlled manner.

25

Suspension device (2) depicted in Figure 3 is composed of an outer bell (30), which is configured in a cylindrical manner, and an interior piston (50). Piston (50), arranged so as to be co-axial with respect to outer bell (30), is configured as a double rolling piston. First (upper) partial piston (51) of double rolling piston (50) has exterior diameter (D_a), whereas second (lower) partial piston (55) has exterior diameter (D_b). Piston (50) made up of partial pistons (51) and (55), is axially movable within outer bell (30) having interior diameter (D_1).

35

Inside widths ($D_1 - D_a$) and ($D_1 - D_b$) between partial pistons

10

20

30

THE UNIVERSITY OF CHICAGO

THE UNIVERSITY OF CHICAGO

	50	rolling piston, piston
	51	upper segment
	52	bore
	53	recess
5	55	lower segment
	56,57	exterior walls
	58,59	clamping rings
	61	blind-hole bore
10	62	interior hollow space, central
	63	bores
	64	leaf valve
	65	exterior hollow space, annular space
	66	tubular membrane
15	67	ring adapter
	68	valve
	69	adapter, adapter having articulated joint
	70	hydraulic accumulator
20	71	membrane
	72	gas cushion
	74	housing
	75	fluid space
25	76	working line, tubular connector
	77	choker valves, pressure stage valves
	80	shock absorber
	81	shock absorber rod
30	82	tubular connector, pump connection
	86	cover, sleeve cylinder
	88	extension of shock absorber tube
	90	spring ring
	92,94,96	O-ring
35	D1	interior diameter outer bell
	Da	exterior diameter first piston
	Db	exterior diameter second piston

ABSTRACT

A combined spring-and-shock-absorber system for supporting wheel suspensions or axles on a vehicle body has a tubular roll bellows (U-bellows) arranged between a wheel-bearing or wheel-controlling connection and a connection on the vehicle body side, the bellows being arranged between an outer bell and a rolling piston, the outer bell and the rolling piston, in each case, having at least partially varying diameters over the height of the corresponding component, and having walls that contact the tubular roll bellows. Both ends of the tubular roll bellows being sealingly secured on the rolling piston at segments having different diameters, the lower mounting section having a larger diameter than the upper mounting section. For this purpose, a tubular roll bellows is used, which is configured as a differential roll bellows, whose interior is filled with a fluid and communicates with a hydraulic accumulator supported on the chassis and/or vehicle body.

On the basis of the present invention, a combined spring-and-shock-absorber system is developed, which contains a friction-free displacement device in a thin construction.

SPRING-AND-SHOCK-ABSORBER SYSTEM HAVING DIFFERENTIAL ROLL
BELLOWS5 [Description] FIELD OF THE INVENTION

The present invention relates to a combined
spring-and-shock-absorber system for supporting wheel
suspensions or axles on a vehicle body using a tubular roll
bellows (U-bellows) arranged between a wheel-bearing or
10 wheel-controlling connection and a connection on the vehicle
body side, the bellows being arranged between an outer bell
and a rolling piston, the outer bell and the rolling piston,
in each case, having at least partially varying diameters over
the height of the corresponding component, and having [at
15 least partially varying diameters with respect to the] walls
that contact the tubular roll bellows[, and both]. Both ends
of the tubular roll bellows [being] are sealingly secured on
the rolling piston at segments having different diameters, the
lower mounting section having a larger diameter than the upper
20 mounting section.

BACKGROUND INFORMATION

United States Published Patent No. 4,518,154, describes a
conventional [From U.S. Patent 4,518,154, a] pneumatic
25 suspension system [of this type] for vehicles [is known]. The
outer bell and the multi-part rolling piston enclose a unitary
differential roll bellows. Due to the low gas pressure and the
use of a differential roll bellows, this design [requires] may
require an installation space of an excessively large volume.

30 In addition, [from] German Published Patent No. 297 02 927
[C1, a] describes a conventional spring-and-shock-absorber
system [is known], which is composed of a displacement device
without a bellows, a hydraulic accumulator, and a hydraulic
35 line connecting these parts. In the hydraulic line, a

side, having the same piston surfaces. The bellows are essentially freestanding bellows, whereas in the exemplary embodiments according to the invention, the bellows are supported over virtually the entire area between an outer bell and a rolling piston. Between the bellows, there is a mechanical transmission element that is independent of the bellows.

As described in numerous publications and from practice, conventional diverse motor vehicle air suspension systems are [known. They are] essentially composed of a roll bellows that encloses a volume of air and that is bordered on its one end by a chassis-fixed covering plate and on its other end by a wheel-side rolling piston. Conventional air spring systems of this type [have no] may lack stability with regard to tilting, so that additional measures [are] may be required for the longitudinal and transverse guiding functions.

SUMMARY OF THE INVENTION

The present invention [is based on the problem] concerns the development of [developing] a combined spring-and-shock-absorber system, which contains a low-friction, thin-design displacement device that is based on a tubular roll bellows and that has great transverse rigidity. In addition, [the] an objective of the present invention [can be seen in] may include creating a suspension device that is acted upon by a pressure medium, the device being controllable with regard to suspension performance and the height of the spring, and it being such that it is completely or at least substantially possible to do without external longitudinal and transverse suspension links.

[The problem is solved by the features of the main claim. For this purpose] According to one exemplary embodiment and/or

The type of displacement bellows, the type of connection on the chassis and on the vehicle body, and the [fact] possibility that the bellows interior [is] may be filled with a fluid that is prestressed using a gas make possible a slim displacement device that does not have a mechanical, friction-producing longitudinal guide element. A separate longitudinal guide element [is] may be superfluous because the pressure in the displacement bellows, as a result of the two bellows menisci, centers and stabilizes the shock-absorber leg parts, which move relative to each other.

In response to a pressurizing or depressurizing of the displacement device, a hydraulic fluid flows back and forth between the displacement device and the hydraulic accumulator via a narrowing of the cross-section in the form of a hydraulic line or an opening. The configuration of the line, or the opening, and the characteristics of the restrictors arranged there influence the system dampening in accordance with the size and shape of the opening cross-section. In this context, the individual restrictor [can] may be configured either as a nozzle or an aperture, or at least as a one-way restrictor. When one-way restrictors are used, at least one valve for each flow direction [is] may be arranged in the cross-section of the line, or the opening.

The gas cushion of the hydraulic accumulator normally constitutes the suspension system.

As a result of using a tubular roll bellows in the form of a

demonstrate virtually ideal responsiveness over the entire range of damping rates. The outer bell and/or the rolling piston [can] may each be directly secured--even without the interposition of rubber-elastic elements--on the vehicle body, or on the chassis, via flexible couplings. This [reduces] may reduce, inter alia, the component weight, the manufacturing costs, the difficulty of assembly, and maintenance costs.

Both rolling piston halves, in addition to the two corresponding halves of the differential roll bellows in the suspension device according to the present invention, provide a self-centering guide function between the double rolling piston and the outer bell. On account of the relatively high operating pressure -- in comparison to conventional air suspension systems -- this radial guidance [is] may be especially stable.

On the other hand, due to the rubber-elastic decoupling of piston and outer bell, the excitation of higher-frequency vibrations [is] may be filtered out. The shape of the suspension device as a differential roll bellows [is] may be oblong, which, in addition to the very good radial (lateral) guidance, also provides very good longitudinal guidance. For this reason, it is possible, substantially or even entirely, to dispense with a separate longitudinal and transverse control arm.

The spring force is determined by the difference in the effective radii of curvature of the two roll bellows halves (differential roll bellows halves). The radii of curvature of the roll bellows halves are produced by the differences in the

radii (or diameters) of the outer bell and the two piston (halves). If the difference between the individual piston radii is slight, then the difference in the radii of curvature of the roll bellows halves [will] may also be slight. This has the consequence that it is possible to operate at a high operating pressure, as [is] may be required in active chassis control systems.

The difference in the effective roll-bellows radii of curvature, instead of using a difference in the piston radii, [can] may be realized using a radius difference of the effective outer-bell segments.

The roll bellows halves, arranged so as to be opposite each other, are clamped, on one side, to the outer bell and, on the other side, to the piston using clamping rings so as to be fixed in a mechanically reliable fashion and tight in the pneumatic/hydraulic sense.

The filling of the spring and the control system, specifically setting the spring level, but also controlling the rolling motion, [can] may be carried out using a controlled pressure pump, which [can] may be connected to the tubular connectors located on the outer bell. In addition, an accumulator volume [can] may also be connected.

For receiving a shock absorber, the piston [is preferably] may be configured so as to be a hollow cylinder. In this manner, it is possible to do without a separately arranged shock absorber. This [saves] may save both additional installation space as well as additional assembly work. The shock absorber, surrounded by the spring sleeve, [is] may be protected from road impurities.

The spring volume of the roll bellows halves [can] may

rolling piston (50).

Outer bell (30) is a hollow body, which contains here two at least partially cylindrical segments (31, 33), which are connected to each other by a transition piece (32) in the shape of a truncated-cone sleeve. In Figure 1, segments (31, 32) and transition piece (33) are made of one part. Upper segment (31) is closed at its upper end by a plate (34). On plate (34), an adapter (35) is formed for the articulated connection to the vehicle body. The interior diameter of the upper, cylindrical segment (31) is, for example, one third smaller than the interior diameter of lower, cylindrical segment (33).

Segments (31) and (33) [can] may also have an interior contour in the shape of a truncated cone. In a case of this type, upper segment (31) would taper towards the top and lower segment (33) would taper towards the bottom.

Rolling piston (50) also has an upper (51) and a lower segment (55), both segments (51, 55) having, for example, a cylindrical outer shape (56, 57). The exterior diameter of upper segment (51) is smaller than the exterior diameter of segment (55). The exterior diameter of segment (51) is, for example, roughly 60% of the interior diameter of outer-bell segment (31). The diameter differential in the exemplary embodiment is selected so that, in each case, the gap between segments (31) and (51), opposite each other, is roughly the same width in the zones in which meniscuses (21, 22) of differential roll bellows (11) move.

In Figure 1, lower segment (55) of rolling piston (50) is tapered. The tapering begins below the zone which [can] may be contacted by differential roll bellows (11). The lower end of rolling piston (50) ends in an adapter (69) for the articulated connection to chassis (9).

15

25

30

3.5

5

15

25

35

According to Figure 1, the usable overall stroke of the shock absorber leg corresponds to roughly the interior diameter of outer bell (30) in the area of segment (33).

5 The lengths of individual roll-bellows halves (12) and (13) correspond, for example, to one-and-a-half to double the bellows diameter in the area of the segment (33).

10 Interior (5), enclosed by differential roll bellows (11), is filled with an incompressible fluid (1), which, according to Figure 1, is under pressure by a gas cushion enclosed in a hydraulic accumulator (70). Hydraulic accumulator (70) is configured, for example, as a bubble or membrane accumulator. Gas cushion (72), divided by the bladder or membrane,
15 constitutes the suspension unit of the spring-and-shock-absorber system.

Hydraulic accumulator (70), which is depicted in an arrangement next to outer bell (30) only by way of example, is
20 connected to bellows interior (5) via a working line (76). For this purpose, working line (76) runs through outer-bell segment (33) and connects to connecting sleeve (14). In this way, working line (76) itself positions connecting sleeve (14) in outer-bell segment (33) in a form-locking manner.

25 In housing (74) of hydraulic accumulator (70), on the transition to working line (76), are located two operating pressure-stage valves, opposite each other, in the form of spring-plate valves (77). Each valve (77) opens in one flow
30 direction. In this context, the choking effect of the individual throttle return valve (77) [can] may be carried out so as to be adjustable, if necessary, using a drive that [can] may be controlled or regulated.

35 If appropriate, a blockable supply line [can] may be connected to working line (76). Assuming use as an active

By supplying and removing a predetermined quantity of fluid, additional forces [can] may be realized in an appropriate manner. The supplying or removal of these additional quantities changes the damping and the spring forces in the entire system.

Fluid (1), used in the spring-and-shock-absorber system, is, for example, a solution of water and alcohol. For this solution, all alcohols are appropriate which [can] may be mixed at room temperature in any ratio with water. For example, a water-ethanol solution or a water-glycol solution [is] may be used. A conventional water-glycol solution, which is also used as an anti-freeze coolant in internal combustion engines, [has] may have, for example, an ethylene glycol component of 33 to 50%. Using a 50-percent solution, it [is] may be possible to operate the spring-and-shock-absorber system down to a temperature of -35° Celsius. In addition, this solution [does] may not corrode the usual elastomer materials. Furthermore, the rubber expansion is in the order of magnitude of the expansion in pure water.

Figure 2 depicts a spring-and-shock-absorber system having two hydraulic accumulators, which are integrated in a space-saving manner. For this purpose, at least lower segment (55) of rolling piston (50) is configured as a hollow body, or a stepped blind-hole bore (61), having at least two hollow spaces (62) and (65), which are separated from each other. The hollow spaces, for this purpose, are arranged, for example, so as to be coaxial with respect to each other.

Exterior hollow space (65) is an annular space, which is formed by the interior wall of rolling piston (50) and a

The second hydraulic accumulator is arranged in the area of upper outer-bell segment (31). For this purpose, outer bell (30) is surrounded here by, for example, a tubular housing (41). Between this housing (41) and the exterior contour of outer bell (30) is situated a general annular space, which is divided by a tubular membrane (42) into an inner (43) and outer annular space (44). Inner annular space (43) is filled with gas, see valve (45), whereas exterior annular space (44), comparable to fluid space (75) in Figure 1, communicates with bellows interior (5) via at least one leaf valve (48). Leaf valve(s) (48) in the exemplary embodiments according to Figure 2 are situated in a detachable housing (46). Interior space (47) of housing (46) is connected to bellows interior (5) via working line (76).

If appropriate, spaces (44) and (62) [can] may also be hydraulically connected to each other directly and only communicate with bellows interior (5) via a double-acting leaf valve.

In contrast to Figure 1, a rubber damping element (49), as an elastic limit stop, is located in deaerated return space (7). In addition, upper segment (51) of rolling piston (50) is furnished with a closed bore hole (52) to reduce the unsuspended mass.

Suspension device (2) depicted in Figure 3 is composed of an outer bell (30), which is configured in a cylindrical manner, and an interior piston (50). Piston (50), arranged so as to be co-axial with respect to outer bell (30), is configured as a double rolling piston. First (upper) partial piston (51) of double rolling piston (50) has exterior diameter (D_a), whereas second (lower) partial piston (55) has exterior diameter (D_b). Piston (50) made up of partial pistons (51) and (55), is axially movable within outer bell (30) having interior diameter (D_i).

Inside widths ($D_1 - D_a$) and ($D_1 - D_b$) between partial pistons (51) and (55) and outer bell (30) are filled by two roll-bellows halves (12) and (13), arranged opposite each other. Roll-bellows halves (12, 13) form a differential roll bellows (11) and are made of an elastomer material that is

Piston (50), depicted in the drawing, is configured in a hollow cylindrical manner. Its interior contains a shock absorber (80), whose tube is secured on the upper piston end by a spring ring (90). The sealing tightness between shock absorber (tube) (80) and piston (50) is realized by three O-rings (92, 94, 96). Shock-absorber rod (81) is mounted on a covering plate (86) located on outer bell (30).

If piston (50), mounted on the wheel side, moves axially in relation to chassis-side outer bell (30), then both roll-bellows halves (12, 13), located between piston (50) and outer bell (30), roll, on one side, on the exterior surface of piston (50) and, on the other side, on the interior surface of outer bell (30). The axial force resulting from the application of pressure to roll-bellows halves (12, 13) using compressed air or hydraulic fluid, is proportional to the difference between the effective roll-bellows radii of curvature.

List of Reference Numerals

	1	fluid, water-glycol solution
	2	suspension device
5	5	bellows interior
	7	return space
	9	chassis
	10	displacement device
10	11	tubular roll bellows, differential roll bellows, bellows
	12,13	roll bellows halves, bellows parts
	14	connecting sleeve
	15	tubular segment
15	17,18	clamping rings
	21,22	meniscuses
	23,24	outer walls
	25,26	inner walls
20	30	outer bell
	31	upper segment
	32	transitional piece
	33	lower segment
25	34	base
	35	adapter
	36,37	interior walls
	41	housing, tubular
30	42	membrane, hose-like
	43	interior annular space
	44	exterior annular space
	45	valve
	46	detachable housing
35	47	housing interior space
	48	leaf valve

49 rubber damping element

50 rolling piston, piston

51 upper segment

5 52 bore

53 recess

55 lower segment

56,57 exterior walls

58,59 clamping rings

10

61 blind-hole bore

62 interior hollow space, central

63 bores

64 leaf valve

15 65 exterior hollow space, annular space

66 tubular membrane

67 ring adapter

68 valve

69 adapter, adapter having articulated joint

20

70 hydraulic accumulator

71 membrane

72 gas cushion

74 housing

25 75 fluid space

76 working line, tubular connector

77 choker valves, pressure stage valves

30 80 shock absorber

81 shock absorber rod

82 tubular connector, pump connection

86 cover, sleeve cylinder

88 extension of shock absorber tube

35 90 spring ring

92,94,96 O-ring

Dl interior diameter outer bell
Da exterior diameter first piston
Db exterior diameter second piston

[Abstract] ABSTRACT

[The present invention relates to a] A combined
 5 spring-and-shock-absorber system for supporting wheel
 suspensions or axles on a vehicle body [using] has a tubular
 roll bellows (U-bellows) arranged between a wheel-bearing or
 wheel-controlling connection and a connection on the vehicle
 10 body side, the bellows being arranged between an outer bell
 and a rolling piston, the outer bell and the rolling piston,
 in each case, having at least partially varying diameters over
 the height of the corresponding component, and having [at
 least partially varying diameters with respect to the] walls
 that contact the tubular roll bellows[, and both]. Both ends
 15 of the tubular roll bellows being sealingly secured on the
 rolling piston at segments having different diameters, the
 lower mounting section having a larger diameter than the upper
 mounting section. For this purpose, a tubular roll bellows is
 used, which is configured as a differential roll bellows,
 20 whose interior is filled with a fluid and communicates with a
 hydraulic accumulator supported on the chassis and/or vehicle
 body.

On the basis of the present invention, a combined
 25 spring-and-shock-absorber system is developed, which contains
 a friction-free displacement device in a thin construction.

3/PRTS

10/069661

JC19 Rec'd PCT/PTO 25 FEB 2002

[10537/199]

SPRING-AND-SHOCK-ABSORBER SYSTEM HAVING DIFFERENTIAL ROLL BELLOWS

Description

5

The present invention relates to a combined spring-and-shock-absorber system for supporting wheel suspensions or axles on a vehicle body using a tubular roll bellows (U-bellows) arranged between a wheel-bearing or wheel-controlling connection and a connection on the vehicle body side, the bellows being arranged between an outer bell and a rolling piston, the outer bell and the rolling piston, in each case, over the height of the corresponding component, having at least partially varying diameters with respect to the walls that contact the tubular roll bellows, and both ends of the tubular roll bellows being sealingly secured on the rolling piston at segments having different diameters, the lower mounting section having a larger diameter than the upper mounting section.

10

15

20

25

From U.S. Patent 4,518,154, a pneumatic suspension system of this type for vehicles is known. The outer bell and the multi-part rolling piston enclose a unitary differential roll bellows. Due to the low gas pressure and the use of a differential roll bellows, this design requires an installation space of an excessively large volume.

30

35

In addition, from German Patent 297 02 927 C1, a spring-and-shock-absorber system is known, which is composed of a displacement device without a bellows, a hydraulic accumulator, and a hydraulic line connecting these parts. In the hydraulic line, a mechanical choker valve is arranged. The displacement device, as is familiar in a hydropneumatic suspension system, connects the vehicle wheel suspension to the vehicle body. The system is filled with a hydraulic fluid. The latter, when a vehicle wheel is spring deflected, is forced through the choker valve into a hydraulic accumulator.

The present invention is based on the problem of developing a combined spring-and-shock-absorber system, which contains a low-friction, thin-design displacement device that is based on a tubular roll bellows and that has great transverse rigidity. In addition, the objective of the present invention can be seen in creating a suspension device that is acted upon by a pressure medium, the device being controllable with regard to suspension performance and the height of the spring, and it being such that it is completely or at least substantially possible to do without external longitudinal and transverse suspension links.

2

accumulator that is supported on the chassis or on the vehicle side.

The type of displacement bellows, the type of connection on the chassis and on the vehicle body, and the fact that the bellows interior is filled with a fluid that is prestressed using a gas make possible a slim displacement device that does not have a mechanical, friction-producing longitudinal guide element. A separate longitudinal guide element is superfluous because the pressure in the displacement bellows, as a result of the two bellows meniscuses, centers and stabilizes the shock-absorber leg parts, which move relative to each other.

In response to a pressurizing or depressurizing of the displacement device, a hydraulic fluid flows back and forth between the displacement device and the hydraulic accumulator via a narrowing of the cross-section in the form of a hydraulic line or an opening. The configuration of the line, or the opening, and the characteristics of the restrictors arranged there influence the system dampening in accordance with the size and shape of the opening cross-section. In this context, the individual restrictor can be configured either as a nozzle or an aperture, or at least as a one-way restrictor. When one-way restrictors are used, at least one valve for each flow direction is arranged in the cross-section of the line, or the opening.

The gas cushion of the hydraulic accumulator normally constitutes the suspension system.

As a result of using a tubular roll bellows in the form of a differential roll bellows, the mechanical friction of the entire system is essentially reduced to the interior friction of the bellows or membrane material. As a result, the spring-and-shock-absorber system demonstrates virtually ideal responsiveness over the entire range of damping rates. The outer bell and/or the rolling piston can each be directly

secured--even without the interposition of rubber-elastic elements--on the vehicle body, or on the chassis, via flexible couplings. This reduces, inter alia, the component weight, the manufacturing costs, the difficulty of assembly, and maintenance costs.

Both rolling piston halves, in addition to the two corresponding halves of the differential roll bellows in the suspension device according to the present invention, provide a self-centering guide function between the double rolling piston and the outer bell. On account of the relatively high operating pressure -- in comparison to conventional air suspension systems -- this radial guidance is especially stable.

On the other hand, due to the rubber-elastic decoupling of piston and outer bell, the excitation of higher-frequency vibrations is filtered out. The shape of the suspension device as a differential roll bellows is oblong, which, in addition to the very good radial (lateral) guidance, also provides very good longitudinal guidance. For this reason, it is possible, substantially or even entirely, to dispense with a separate longitudinal and transverse control arm.

The spring force is determined by the difference in the effective radii of curvature of the two roll bellows halves (differential roll bellows halves). The radii of curvature of the roll bellows halves are produced by the differences in the radii (or diameters) of the outer bell and the two piston (halves). If the difference between the individual piston radii is slight, then the difference in the radii of curvature of the roll bellows halves will also be slight. This has the consequence that it is possible to operate at a high operating pressure, as is required in active chassis control systems.

The difference in the effective roll-bellows radii of curvature, instead of using a difference in the piston radii,

can be realized using a radius difference of the effective outer-bell segments.

The roll bellows halves, arranged so as to be opposite each other, are clamped, on one side, to the outer bell and, on the other side, to the piston using clamping rings so as to be fixed in a mechanically reliable fashion and tight in the pneumatic/hydraulic sense.

The filling of the spring and the control system, specifically setting the spring level, but also controlling the rolling motion, can be carried out using a controlled pressure pump, which can be connected to the tubular connectors located on the outer bell. In addition, an accumulator volume can also be connected.

For receiving a shock absorber, the piston is preferably configured so as to be a hollow cylinder. In this manner, it is possible to do without a separately arranged shock absorber. This saves both additional installation space as well as additional assembly work. The shock absorber, surrounded by the spring sleeve, is protected from road impurities.

The spring volume of the roll bellows halves can alternatively be filled with a compressed gas (preferably air) or with a hydraulic fluid.

Further details of the present invention can be found in the subclaims and in the description below of two schematically depicted exemplary embodiments:

Figure 1: spring-and-shock-absorber system having a differential roll bellows and an external hydraulic accumulator;

Figure 2: spring-and-shock-absorber system having an

5

10

15

25

35

In Figure 1, lower segment (55) of rolling piston (50) is tapered. The tapering begins below the zone which can be contacted by differential roll bellows (11). The lower end of rolling piston (50) ends in an adapter (69) for the articulated connection to chassis (9).

Differential roll bellows (11), arranged between rolling piston (50) and outer bell (30), is composed, inter alia, of two potentially identical tubular roll-bellows halves (12, 13). Roll bellows halves (12, 13) are oriented in a coaxial manner with respect to each other and are mounted on each other in a gas- and fluid-tight manner via a roughly tubular connecting sleeve (14). Connecting sleeve (14) is a short tube, onto which from both sides a roll-bellows half (12, 13) is slid. Each attached segment of corresponding roll-bellows halves (12, 13) is fixed in a non-skid manner on connecting sleeve (14) using a clamping ring (17, 18), for example, in a force- and form-locking manner. In Figures 1 and 2, the connecting sleeve between clamping rings (17, 18) has a tubular segment (15), which is not covered by roll-bellows halves (12, 13). This tubular segment (15) has an exterior diameter which is only slightly smaller than the interior diameter of lower segment (33) of outer bell (30).

Consequently, in response to every operationally-caused relative motion between parts (30) and (50), exterior walls (23, 24) of differential roll bellows (11) roll on outer walls (56, 57) and inner walls (36, 37). Because in the exemplary

5 embodiments, menisci (21, 22) of differential roll bellows (11) move in narrow annular spaces having cylindrical walls, the centering forces and the transverse rigidity are virtually constant over the entire stroke of the spring-and-shock-absorber leg.

10 Therefore, menisci (21, 22) in the entire stroke range move between rolling piston (50) and outer bell (30) in, for example, cylindrical zones. In this context, meniscus (21) realizes a piston surface, which is, for example, two-thirds

15 smaller than the active piston surface on segment (55).

According to Figure 1, the usable overall stroke of the shock absorber leg corresponds to roughly the interior diameter of outer bell (30) in the area of segment (33).

20 The lengths of individual roll-bellows halves (12) and (13) correspond, for example, to one-and-a-half to double the bellows diameter in the area of the segment (33).

25 Interior (5), enclosed by differential roll bellows (11), is filled with an incompressible fluid (1), which, according to Figure 1, is under pressure by a gas cushion enclosed in a hydraulic accumulator (70). Hydraulic accumulator (70) is configured, for example, as a bubble or membrane accumulator.

30 Gas cushion (72), divided by the bladder or membrane, constitutes the suspension unit of the spring-and-shock-absorber system.

Hydraulic accumulator (70), which is depicted in an

35 arrangement next to outer bell (30) only by way of example, is connected to bellows interior (5) via a working line (76). For this purpose, working line (76) runs through outer-bell

segment (33) and connects to connecting sleeve (14). In this way, working line (76) itself positions connecting sleeve (14) in outer-bell segment (33) in a form-locking manner.

5 In housing (74) of hydraulic accumulator (70), on the transition to working line (76), are located two operating pressure-stage valves, opposite each other, in the form of spring-plate valves (77). Each valve (77) opens in one flow direction. In this context, the choking effect of the
10 individual throttle return valve (77) can be carried out so as to be adjustable, if necessary, using a drive that can be controlled or regulated.

If appropriate, a blockable supply line can be connected to
15 working line (76). Assuming use as an active spring-and-shock-absorber system, or as a level regulator, fluid would be supplied or removed from the displacement device via a supply line of this type.

20 By supplying and removing a predetermined quantity of fluid, additional forces can be realized in an appropriate manner. The supplying or removal of these additional quantities changes the damping and the spring forces in the entire system.

25 Fluid (1), used in the spring-and-shock-absorber system, is, for example, a solution of water and alcohol. For this solution, all alcohols are appropriate which can be mixed at room temperature in any ratio with water. For example, a
30 water-ethanol solution or a water-glycol solution is used. A conventional water-glycol solution, which is also used as an anti-freeze coolant in internal combustion engines, has, for example, an ethylene glycol component of 33 to 50%. Using a 50-percent solution, it is possible to operate the spring-and-
35 shock-absorber system down to a temperature of -35° Celsius. In addition, this solution does not corrode the usual elastomer materials. Furthermore, the rubber expansion is in

the order of magnitude of the expansion in pure water.

Figure 2 depicts a spring-and-shock-absorber system having two hydraulic accumulators, which are integrated in a space-saving manner. For this purpose, at least lower segment (55) of rolling piston (50) is configured as a hollow body, or a stepped blind-hole bore (61), having at least two hollow spaces (62) and (65), which are separated from each other. The hollow spaces, for this purpose, are arranged, for example, so as to be coaxial with respect to each other.

Exterior hollow space (65) is an annular space, which is formed by the interior wall of rolling piston (50) and a foliated tubular membrane (66). Tubular membrane (66), for this purpose, is fixed at the upper end by a ring adapter (67) in the area of the base of blind-hole bore (61) and at its lower end by a comparable ring adapter (67) in a base plate screwed into rolling piston (50). Annular space (65) is filled with gas via a valve (68) that is situated in this base plate.

Central hollow space (62) is in a hydraulic connection to bellows interior (5) via bore holes (63) and a double-acting leaf valve (64).

The second hydraulic accumulator is arranged in the area of upper outer-bell segment (31). For this purpose, outer bell (30) is surrounded here by, for example, a tubular housing (41). Between this housing (41) and the exterior contour of outer bell (30) is situated a general annular space, which is divided by a tubular membrane (42) into an inner (43) and outer annular space (44). Inner annular space (43) is filled with gas, see valve (45), whereas exterior annular space (44), comparable to fluid space (75) in Figure 1, communicates with bellows interior (5) via at least one leaf valve (48). Leaf valve(s) (48) in the exemplary embodiments according to Figure 2 are situated in a detachable housing (46). Interior space (47) of housing (46) is connected to bellows interior (5) via

5

10

15

20

35

double rolling piston (50) has exterior diameter (D_a), whereas second (lower) partial piston (55) has exterior diameter (D_b). Piston (50) made up of partial pistons (51) and (55), is axially movable within outer bell (30) having interior diameter (D_1).

Inside widths ($D_1 - D_a$) and ($D_1 - D_b$) between partial pistons (51) and (55) and outer bell (30) are filled by two roll-bellows halves (12) and (13), arranged opposite each other. Roll-bellows halves (12, 13) form a differential roll bellows (11) and are made of an elastomer material that is reinforced by a fabric insert. A (first) roll bellows (12) is assigned to one partial piston (51), whereas other (second) roll bellows (13) surrounds other partial piston (55). The ends of roll-bellows halves (12, 13) are clamped, on one side, on piston (50) using clamping rings (58, 59), and, on the other side, on outer bell (30) using an exterior ring (14) next to clamping rings (17, 18) in a pressure-tight manner. The exterior ring has two tubular connectors (76, 82) for connecting to a pump and to an accumulator (not depicted); the suspension device (2) can be controlled by tubular connectors (76, 82).

Piston (50), depicted in the drawing, is configured in a hollow cylindrical manner. Its interior contains a shock absorber (80), whose tube is secured on the upper piston end by a spring ring (90). The sealing tightness between shock absorber (tube) (80) and piston (50) is realized by three O-rings (92, 94, 96). Shock-absorber rod (81) is mounted on a covering plate (86) located on outer bell (30).

If piston (50), mounted on the wheel side, moves axially in relation to chassis-side outer bell (30), then both roll-bellows halves (12, 13), located between piston (50) and outer bell (30), roll, on one side, on the exterior surface of piston (50) and, on the other side, on the interior surface of outer bell (30). The axial force resulting from the application of pressure to roll-bellows halves (12, 13) using

List of Reference Numerals

	1	fluid, water-glycol solution
	2	suspension device
5	5	bellows interior
	7	return space
	9	chassis
	10	displacement device
10	11	tubular roll bellows, differential roll bellows, bellows
	12,13	roll bellows halves, bellows parts
	14	connecting sleeve
	15	tubular segment
15	17,18	clamping rings
	21,22	meniscuses
	23,24	outer walls
	25,26	inner walls
20	30	outer bell
	31	upper segment
	32	transitional piece
	33	lower segment
25	34	base
	35	adapter
	36,37	interior walls
	41	housing, tubular
30	42	membrane, hose-like
	43	interior annular space
	44	exterior annular space
	45	valve
	46	detachable housing
35	47	housing interior space
	48	leaf valve
	49	rubber damping element

	50	rolling piston, piston
	51	upper segment
	52	bore
	53	recess
5	55	lower segment
	56,57	exterior walls
	58,59	clamping rings
	61	blind-hole bore
10	62	interior hollow space, central
	63	bores
	64	leaf valve
	65	exterior hollow space, annular space
	66	tubular membrane
15	67	ring adapter
	68	valve
	69	adapter, adapter having articulated joint
	70	hydraulic accumulator
20	71	membrane
	72	gas cushion
	74	housing
	75	fluid space
25	76	working line, tubular connector
	77	choker valves, pressure stage valves
	80	shock absorber
	81	shock absorber rod
30	82	tubular connector, pump connection
	86	cover, sleeve cylinder
	88	extension of shock absorber tube
	90	spring ring
	92,94,96	O-ring
35	D1	interior diameter outer bell
	Da	exterior diameter first piston
	Db	exterior diameter second piston

What is claimed is:

1. A combined spring-and-shock-absorber system for supporting wheel suspensions or axles on a vehicle body using a tubular roll bellows arranged between a wheel-bearing or wheel-controlling connection and a connection on the vehicle body side, the bellows being arranged between an outer bell and a rolling piston; on the one hand, the outer bell and the rolling piston, in each case, over the height of the corresponding component, having at least partially varying diameters with respect to the walls that contact the tubular roll bellows, and, on the other and, both ends of the tubular roll bellows being sealingly secured to the rolling piston at segments having different diameters, the lower mounting section having a larger diameter than the upper mounting section,

wherein

- bellows interior (5) is filled with a fluid (1) and communicates with a hydraulic accumulator (70, 44, 62) that is supported on the chassis side and/or vehicle side.

2. The combined spring-and-shock-absorber system as recited in Claim 1,

wherein the tubular roll bellows is an at least two-part differential roll bellows (11).

3. The combined spring-and-shock-absorber system as recited in Claim 1,

wherein both ends of the two bellows parts (12, 13), facing each other, of the mounted differential roll bellows (11) are connected to each other by a connecting sleeve (14).

4. The combined spring-and-shock-absorber system as recited in Claim 1,

wherein the connecting sleeve (14) has a working line (76) that passes through the outer bell (30).

5. The combined spring-and-shock-absorber system as recited in Claim 1,

wherein at least one restrictor or at least two throttle return valves (77, 48, 64) are arranged in the fluid flow between the bellows interior (5) and the hydraulic accumulator (70, 44, 62).

6. The combined spring-and-shock-absorber system as recited in Claim 1,

wherein the fluid (1) is a water-alcohol solution.

7. The combined spring-and-shock-absorber system as recited in Claim 1,

wherein the bellows interior (5), during travel operation, is connected to an external fluid supply via a supply line, for realizing an active spring-and-shock-absorber system.

8. The combined spring-and-shock-absorber system for supporting wheel suspensions or axles on a vehicle body using a tubular roll bellows arranged between a wheel-bearing or wheel-controlling connection and a connection on the vehicle body side, the bellows being arranged between an outer bell and a rolling piston; on the one hand, the outer bell and the rolling piston, in each case, over the height of the corresponding component, having at least partially varying diameters with respect to the walls that contact the tubular roll bellows, and, on the other hand, both ends of the tubular roll bellows being sealingly secured to the rolling piston at segments having different diameters, the lower mounting section having a larger diameter than the upper mounting section,

wherein the bellows interior (5) is filled with a gas.

9. The combined spring-and-shock-absorber system as recited in Claim 8,

wherein

- the roll-bellows halves (12, 13) constitute a differential

roll bellows (11),

- the upper segment (51) and the lower segment (55) constitute a differential roll bellows (50),
- the roll-bellows halves (12, 13) of the differential roll bellows (11) and the upper and lower segments (51, 55) of the differential piston (50) are arranged so as to be opposite each other.

10. The combined spring-and-shock-absorber system as recited in Claims 8 and 10,

wherein the roll-bellows halves (12, 13) roll on the interior surfaces (36, 37) of the upper/lower segment (31, 33) of the outer bell (30) and on the exterior walls (56, 57) of the upper/lower segment (51, 55) of the rolling piston (50).

11. The combined spring-and-shock-absorber system as recited in Claims 8 through 10,

wherein the exterior walls (56, 57) of the rolling piston (50) and the interior surfaces (36, 37) of the outer bell (30) are configured such that the two roll-bellows halves (12, 13), rolling between rolling piston (50) and the outer bell (30), have effective radii that are different from each other.

12. The combined spring-and-shock-absorber system as recited in Claims 8 through 11,

wherein the upper segment (51) of the rolling piston (50), assigned to the one roll-bellows half (12), has a different (larger/smaller) radius than the other segment (55) of the rolling piston (50), assigned to the other roll-bellows half (13).

13. The combined spring-and-shock-absorber system as recited in Claims 8 through 12,

wherein the two roll-bellows halves (12, 13), constituting the differential roll bellows (11), are secured in a pressure-tight manner, on the one side, on the rolling piston (50) using in each case a clamping ring/rolling piston (58, 59)

and, on the other side, on the outer bell (30) using in each case a clamping ring/outer bell (17, 18) and a connecting sleeve (14).

14. The combined spring-and-shock-absorber system as recited in Claims 8 through 13, wherein the volume (bellows interior 5) enclosed by the differential roll bellows (11), is connected to an accumulator volume (70) and to a pressure pump (supply medium) in a regulatable manner, via tubular connectors (76, 82) located in the wall of the outer bell (30).

15. The combined spring-and-shock-absorber system as recited in Claims 8 through 14, wherein the rolling piston (50) is configured in a hollow cylindrical fashion to receive a shock absorber (80), the one end of the shock absorber being secured fixedly on the lower end of the rolling piston (88) and the other end of the shock absorber (shock absorber rod 81) being secured fixedly on a covering plate (86) located on the outer bell (30).

16. The combined spring-and-shock-absorber system as recited in Claims 8 through 15, wherein the rolling piston (50) is configured in a hollow cylindrical fashion and, as a shock-absorber tube, is part of an interior shock absorber (80).

Abstract

The present invention relates to a combined spring-and-shock-absorber system for supporting wheel suspensions or axles on a vehicle body using a tubular roll bellows arranged between a wheel-bearing or wheel-controlling connection and a connection on the vehicle body side, the bellows being arranged between an outer bell and a rolling piston, the outer bell and the rolling piston, in each case, over the height of the corresponding component, having at least partially varying diameters with respect to the walls that contact the tubular roll bellows, and both ends of the tubular roll bellows being sealingly secured on the rolling piston at segments having different diameters, the lower mounting section having a larger diameter than the upper mounting section. For this purpose, a tubular roll bellows is used, which is configured as a differential roll bellows, whose interior is filled with a fluid and communicates with a hydraulic accumulator supported on the chassis and/or vehicle body.

On the basis of the present invention, a combined spring-and-shock-absorber system is developed, which contains a friction-free displacement device in a thin construction.

1/3

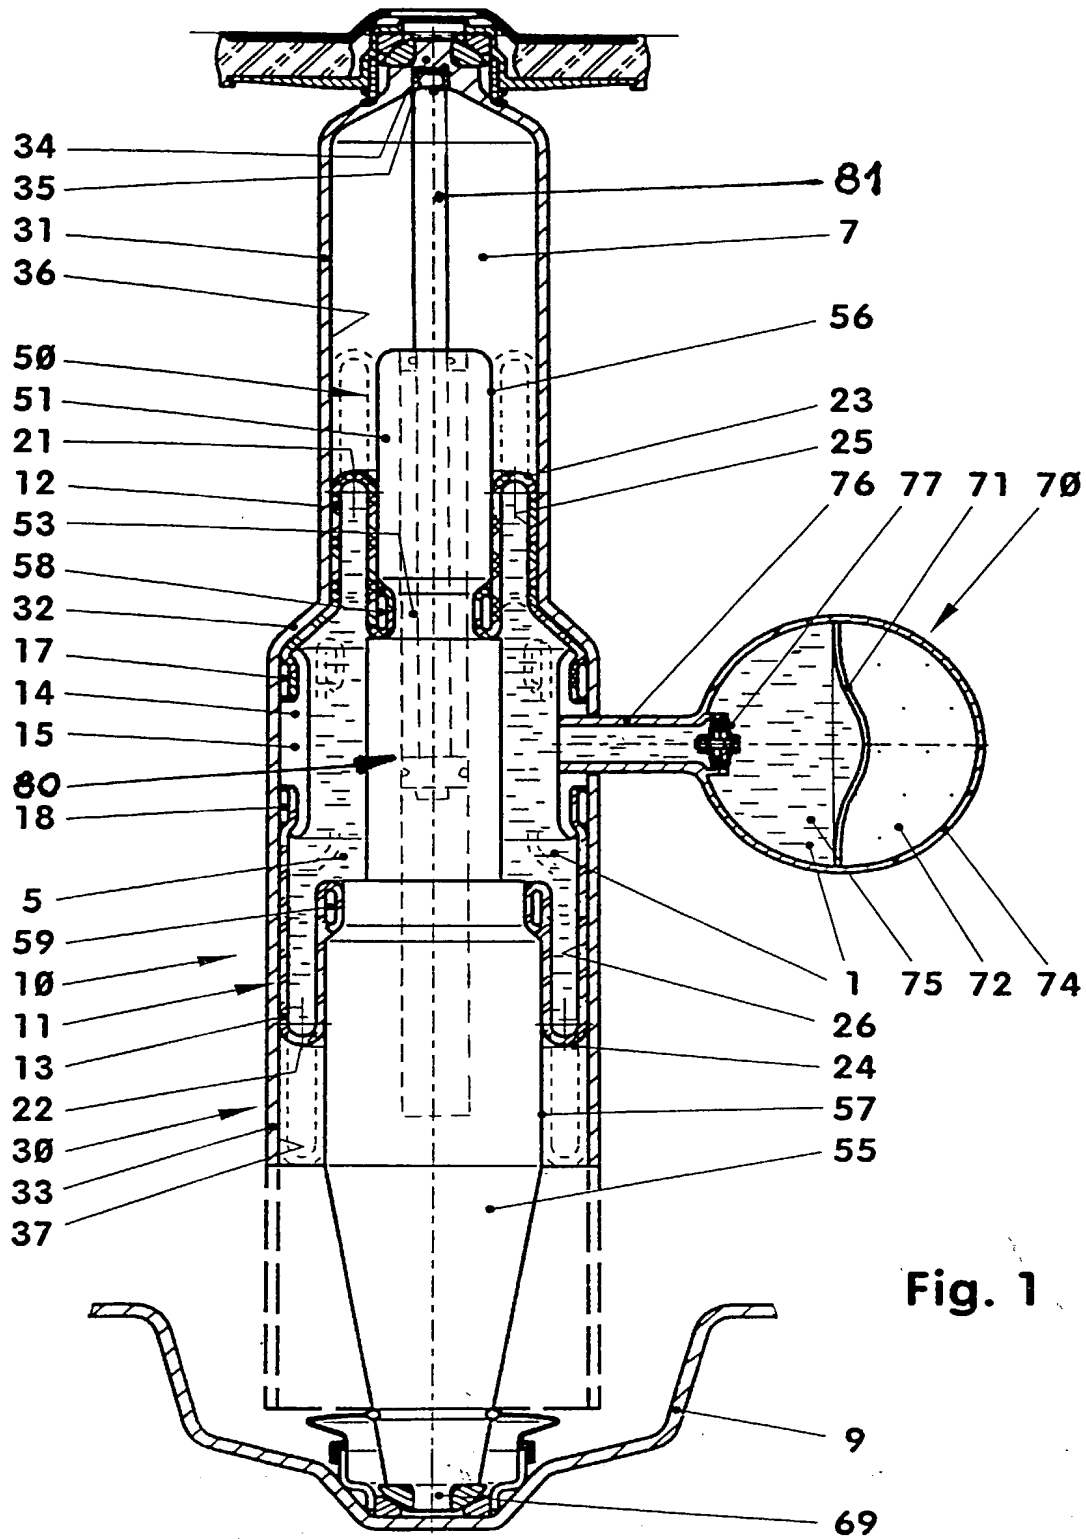


Fig. 1

2/3

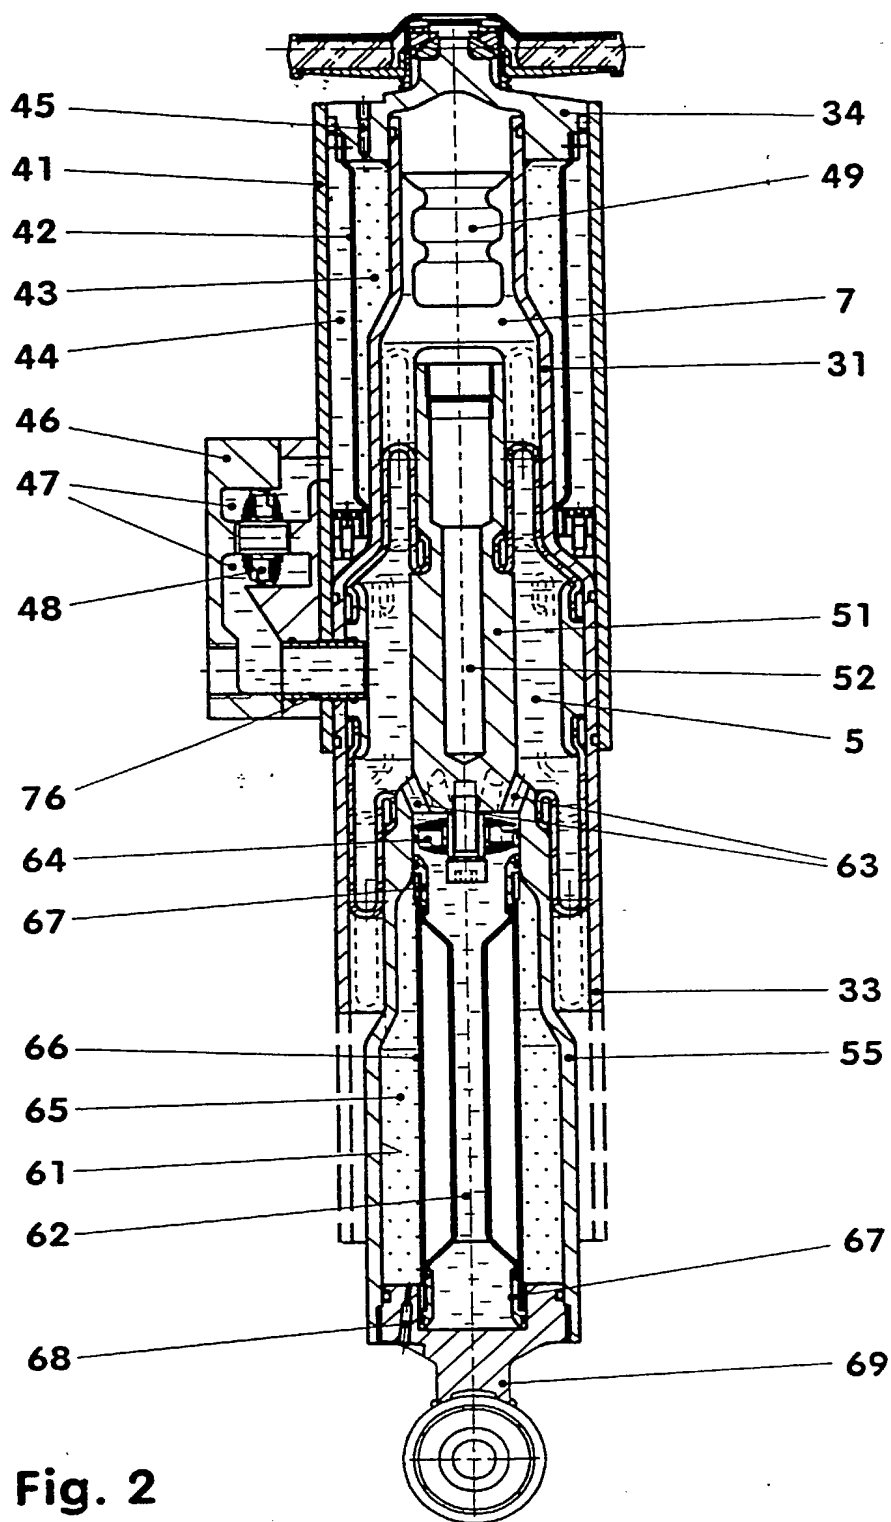


Fig. 2

3/3

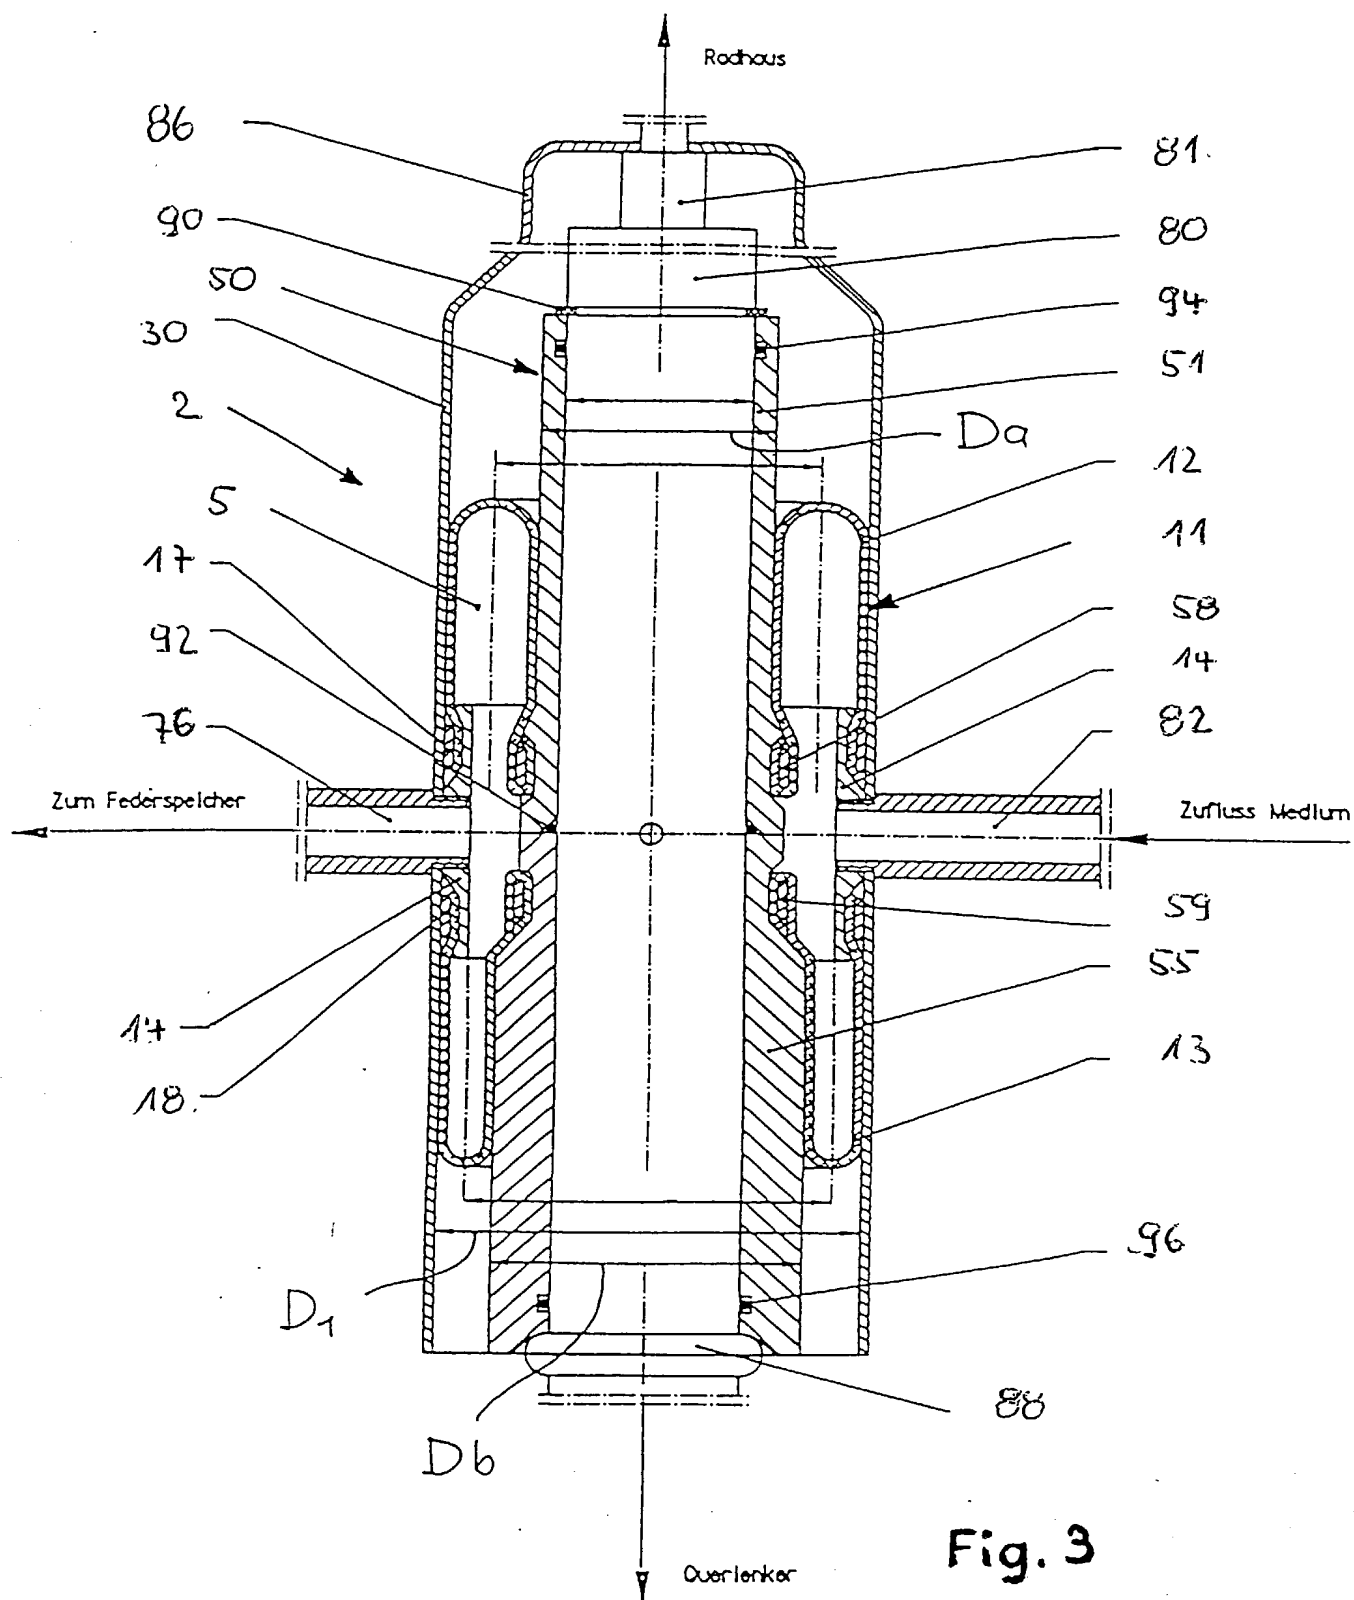


Fig. 3

P032577 / US/1

[10537/199]

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am an original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled **SPRING-AND-SHOCK-ABSORBER SYSTEM HAVING DIFFERENTIAL ROLL BELLOWS**, the specification of which was filed as International Application No. PCT/EP00/08233, on August 23, 2000, and filed with the U.S. Patent Office on February 25, 2002 and assigned Serial No. **10/069,661**.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application(s) for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

PRIOR FOREIGN APPLICATION(S)

Number	Country filed	Day/month/year	Priority Claimed Under 35 USC 119
199 39 969.7	Federal Republic of Germany	24 August 1999	YES
100 24 571.4	Federal Republic of Germany	19 May 2000	YES

And I hereby appoint Richard L. Mayer (Reg. No. 22,490) and Gerard A. Messina (Reg. No. 35,952) my attorneys with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

Please address all communications regarding this application to:

KENYON & KENYON
One Broadway
 New York, New York 10004
CUSTOMER NO. 26646
26646
26646
PATENT/TRADEMARK OFFICE

Please direct all telephone calls to Richard L. Mayer at (212) 425-7200.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful and false statements may jeopardize the validity of the application or any patent issued thereon.

3W Inventor(s): Bernd ACKER

Inventor's Signature: Bernd Acke

Date: 15.04.2002

Residence:

Mittelstrasse 6/1

73733 Esslingen

Federal Republic of Germany

DEY

Citizenship: Federal Republic of Germany

Post Office Address: Same as above.

flw
Inventor(s): Christoph BANK

Inventor's Signature: *Christoph Bank*

Date: 31.05.2002

Residence: An der Feuerwache 6
31275 Lehrte *DEU*
Federal Republic of Germany

Citizenship: Federal Republic of Germany

Post Office Address: Same as above.

SW Inventor(s): Paul CERNY

Inventor's Signature: Paul Cerny

Date: 31.05.2002

Residence: Hoher Weg 4
30974 Wennigsen DEU
Federal Republic of Germany

Citizenship: Federal Republic of Germany

Post Office Address: Same as above.

Inventor(s): Peter GÖNNHEIMER

Inventor's Signature: Peter Gonnheimer

Date: 2002.04.15

Residence: Endersbacher Strasse 16
71384 Weinstadt
Federal Republic of Germany

Citizenship: Federal Republic of Germany

Post Office Address: Same as above.

Inventor(s): Hans-Peter KLANDER

710 Inventor's Signature: Pas Klander

Date: 24.4.2002

Residence: ~~Augsburger Strasse 727a~~ Alte Steige 23
~~70329 Stuttgart~~ 73732 Esslingen a.N.
Federal Republic of Germany DEX ✓

Citizenship: Federal Republic of Germany

Post Office Address: Same as above.

Darko MELJNIKOV

Darko Meljnikov

2002/04/22

Breitwiesenstrasse 13
70771 Leinfelden-Echterdingen
~~Federal Republic of Germany~~ *DEX*



Inventor(s): Matthias RÖMER

Inventor's Signature: Matthias Römer

Date: 22.04.2002

Residence: Schillerstrasse 8
71155 ~~Altdorf~~ DE
Federal Republic of Germany

Citizenship: Federal Republic of Germany

Post Office Address: Same as above.

10w
Inventor(s): Karl-Heinz Röß

Inventor's Signature: Karl He Röß

Date: 15.4.02

Residence: Sudetenweg 7
73061 Ebersbach DE
Federal Republic of Germany

Citizenship: Federal Republic of Germany

Post Office Address: Same as above.

100
Inventor(s): Gehard THUROW

Inventor's Signature: Gerhard Thuro


Date: 05.04.02

Residence: Malchensbrücke 7A DE
30823 Garbsen
Federal Republic of Germany


Citizenship: Federal Republic of Germany

Post Office Address: Same as above.

zw Inventor(s): Martin WINKLER

Inventor's Signature: 

Date: 2002, 5, 2

Residence: Holzgasse 10
71409 Schwaikheim 
Federal Republic of Germany

Citizenship: Federal Republic of Germany

Post Office Address: Same as above.